


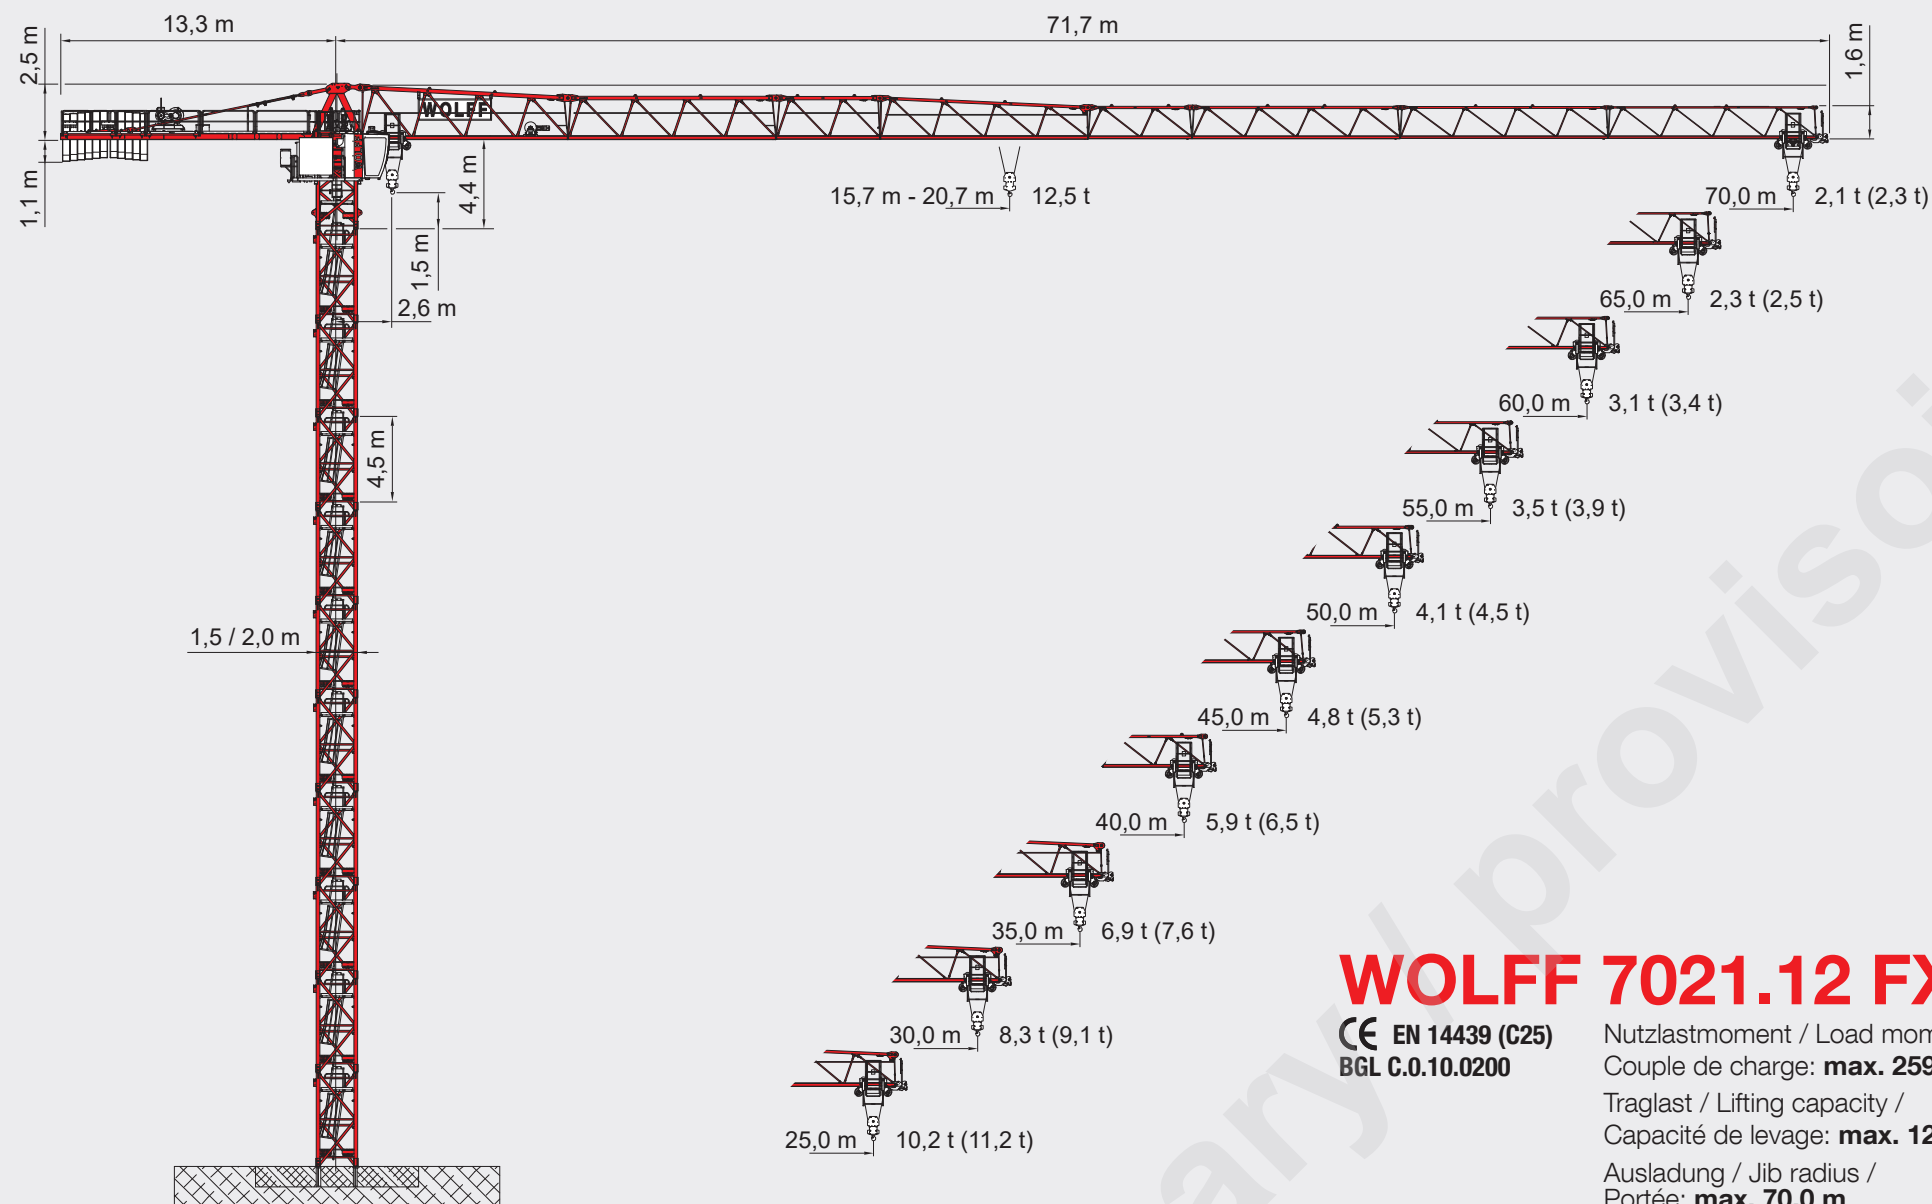

WOLFF 7021.12 FX


CE EN 14439 (C25)
BGL C.0.10.0200



Nutzlastmoment / Load moment /
Couple de charge: **max. 2594 kNm**

Traglast / Lifting capacity /
Capacité de levage: **max. 12,5 t**


Ausladung / Jib radius /
Portée: **max. 70,0 m**



WOLFF 7021.12 FX Kolli Liste · Colli List · Liste de colisage · (Drehteil 70 m / Slewing part 70 m / Partie tournante 70 m)									
Pos. Pos. Pos.	Stck. Pce. Pcs.	Beschreibung / Description / Description	Kolli / Colli / Colis		L [m] Length Longueur	B [m] Width Largeur	H [m] Height Hauteur	Gewicht [kg] Weight Poids	Volumen [m³] Volume Volume
1	1	Turmspitze mit UV/TV 20 Anschluss komplett / Tower head section with UV/TV 20 connection complete / Tête de fût avec raccordement UV/TV 20 complet			7,03	2,43	2,30	9635	39,29
	1	Spitze komplett / Tower top complete / Porte-flèche Pos. 1 zerlegt / Item 1 disassembled / Pos. 1 groupe			2,26	2,40	0,50	1240	2,71
	1	Turmspitzenunterteil / Tower top lower part / Pivot tournant Pos. 1 zerlegt / Item 1 disassembled / Pos. 1 groupe			5,85	2,43	2,30	7890	32,70
2	1	Führerhausstation / Driver's cab with suspension / Cabine avec fixation			5,26	2,00	2,56	2610	26,93
3	1	Gegenausleger inkl. Hubwerk Hw1275v1FU und Abspannung / Counterjib incl. hoist winch Hw1275v1FU and brace / Contreflèche incl. treuil de levage Hw1275v1FU et hauban			12,29	2,50	1,56	8520	47,93
	1	Hubwerk Hw1275v1FU / Hoist winch Hw1275v1FU / Treuil de levage Hw1275v1FU (Hubseil 180 m / Hoist rope 180 m / Câble de levage 180 m)			1,98	1,58	1,65	2480 (240)	5,22
4	1	Auslegerstück 1A / Jib element 1A / Section de flèche 1A mit WOLFF Schild / with WOLFF sign / avec panneau WOLFF			10,35	1,23	2,56	3670	32,59
5	1	Auslegerstück 1B / Jib element 1B / Section de flèche 1B			10,34	1,14	2,18	2260	25,70
6	1	Auslegerstück 2 / Jib element 2 / Section de flèche 2			5,31	1,14	2,15	1000	13,01
7	1	Auslegerstück 3 / Jib element 3 / Section de flèche 3			10,29	1,14	2,11	1740	24,75
8	1	Auslegerstück 4 / Jib element 4 / Section de flèche 4			5,27	1,14	1,68	745	10,09
9		Auslegerstück 5 / Jib element 5 / Section de flèche 5			2,77	1,14	1,68	330	5,31
10	1	Auslegerstück 6 / Jib element 6 / Section de flèche 6			10,23	1,14	1,68	1120	19,59
11	1	Auslegerstück 7 / Jib element 7 / Section de flèche 7			10,19	1,14	1,67	800	19,40
12	1	Auslegerstück 8 / Jib element 8 / Section de flèche 8			10,18	1,14	1,66	690	19,26
12	1	Seilwirbeltraverse / Rope swivel crossbeam / Traverse de pointe fixe			0,98	1,17	1,52	180	1,74
13	1	Laufkatze LK 12 / Trolley LK 12 / Chariot de distribution LK 12 inkl. Unterflasche U 12 / incl. hook block U 12 / incl. crochet U 12			1,80	1,90	2,18	815	7,46
	1	Unterflasche U 12 / Hook block U 12 / Crochet U 12			0,92	0,56	0,26	430	0,11
14	14	Gegengewicht 2,7 t / Counterweight 2,7 t / Contrepoids 2,7 t			2,22	1,41	0,36	2700	1,13



Maße Kolliliste /
Dimensions colli list /
Dimension Liste de colisage



Standard LKW /
Standard Truck /
Camion ordinaire

- * Drehteil 70 m EXW /
- * Slewing part 70 m EXW /
- * Partie tournante 70 m EXW

Ausladung / Jib radius / Portée (m)			20	25	30	35	40	45	50	55	60	65	70	
Auslegerlänge / Jib length / Longueur de flèche (m)	70	2,6 - 17,3	 12,5 t	10,7	8,3	6,8	5,7	4,8	4,2	3,7	3,2	2,9	2,6	2,3
	65	2,6 - 17,1		10,6	8,2	6,7	5,6	4,8	4,1	3,6	3,2	2,8	2,5	
	60	2,6 - 19,7		12,3	9,6	7,9	6,6	5,6	4,9	4,3	3,8	3,4		
	55	2,6 - 19,9		12,4	9,7	7,9	6,6	5,7	4,9	4,3	3,9			
	50	2,6 - 20,5		12,5	10,1	8,2	6,9	5,9	5,1	4,5				
	45	2,6 - 21,0		12,5	10,3	8,4	7,1	6,1	5,3					
	40	2,6 - 22,2		12,5	11,0	9,0	7,6	6,5						
	35	2,6 - 22,3		12,5	11,0	9,0	7,6							
	30	2,6 - 22,5		12,5	11,2	9,1								
25	2,6 - 22,6	12,5	11,2											
Tragfähigkeit / Load capacity / Capacité de charge (t)														